

SPECIFICATIONS

| Size                               | Metric      | British            |
|------------------------------------|-------------|--------------------|
| Max. Working Height                | 18.00m      | 59ft 1in           |
| Max. Platform Height               | 16.00m      | 52ft 6in           |
| Max. Operating Range               | 8.30m       | 27ft 3in           |
| Max. Platform Range                | 7.70m       | 25ft 3in           |
| Up and Over Clearance              | 8.90m       | 29ft 2in           |
| Overall Length(Stowed) <b>A</b>    | 7.21m       | 23ft 8in           |
| Overall Length(Transport) <b>B</b> | 6.10m       | 20ft               |
| Overall Width(Stowed) <b>C</b>     | 1.73m       | 5ft 8in            |
| Overall Height(Stowed) <b>D</b>    | 2.00m       | 6ft 7in            |
| Platform Size(Length×Width)        | 1.45m×0.76m | 4ft 9in × 2ft 6in  |
| Turntable Tailswing                | 0           | 0                  |
| Ground Clearance                   | 0.20m       | 8in                |
| Wheelbase <b>E</b>                 | 2.00m       | 6ft 7in            |
| Turning Radius(Inside/Outside)     | 2.08m/3.30m | 6ft 10in/10ft 10in |
| Tyres                              | 17.5×6.75   | 17.5×6.75          |


| Performance          |                    |                    |
|----------------------|--------------------|--------------------|
| S.W.L                | 230kg              | 507lb              |
| Max. Occupants       | 2                  | 2                  |
| Gradeability         | 25%                | 25%                |
| Travel Speed(Stowed) | 6.1km/h            | 3.8mph             |
| Travel Speed(Raised) | 1.1km/h            | 0.7mph             |
| Max.Working Slope    | X-3°/Y-3°          | X-3°/Y-3°          |
| Turret Rotation      | 360 °Discontinuity | 360 °Discontinuity |
| Platform Rotation    | 180°               | 180°               |
| Jib Movement         | 130°               | 130°               |

| Weight         |        |         |
|----------------|--------|---------|
| Overall Weight | 7420kg | 16358lb |


| Power              |           |           |
|--------------------|-----------|-----------|
| Battery            | 48V/300Ah | 48V/300Ah |
| Charger            | 48V/35A   | 48V/35A   |
| Hydraulic Oil Tank | 30L       | 7.9gal    |



ELECTRIC

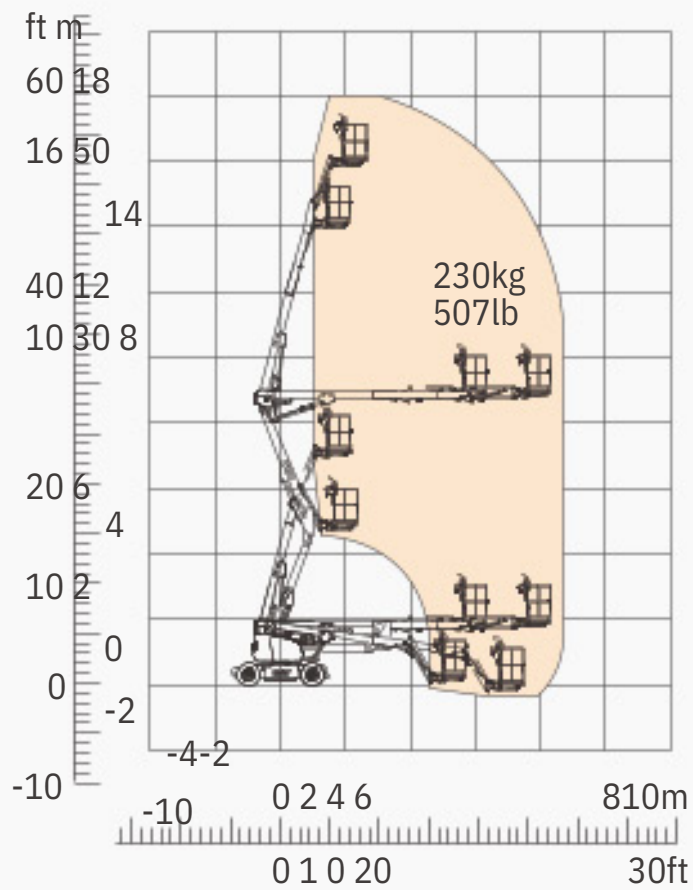


Range Of Motion

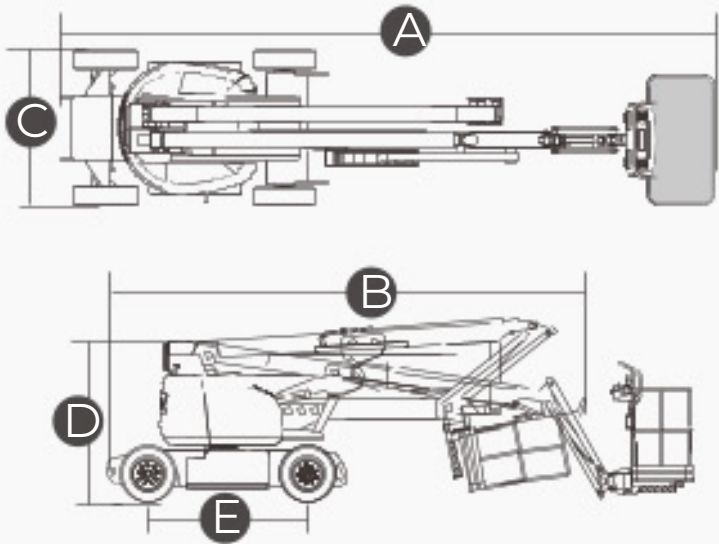

## FEATURES

### Standard Items

- Proportional Controls
- Manual Safety Pump
- Hour Meter
- Tilt Sensor
- 360° Turntable Rotation
- Self-leveling Platform
- Deadman
- Foam-filled Tyres
- Two-Wheel Steering
- Two-Wheel Drive
- Flashing Beacon
- All Motion Alarm
- Onboard Diagnostic System
- Horn
- Zero Emission

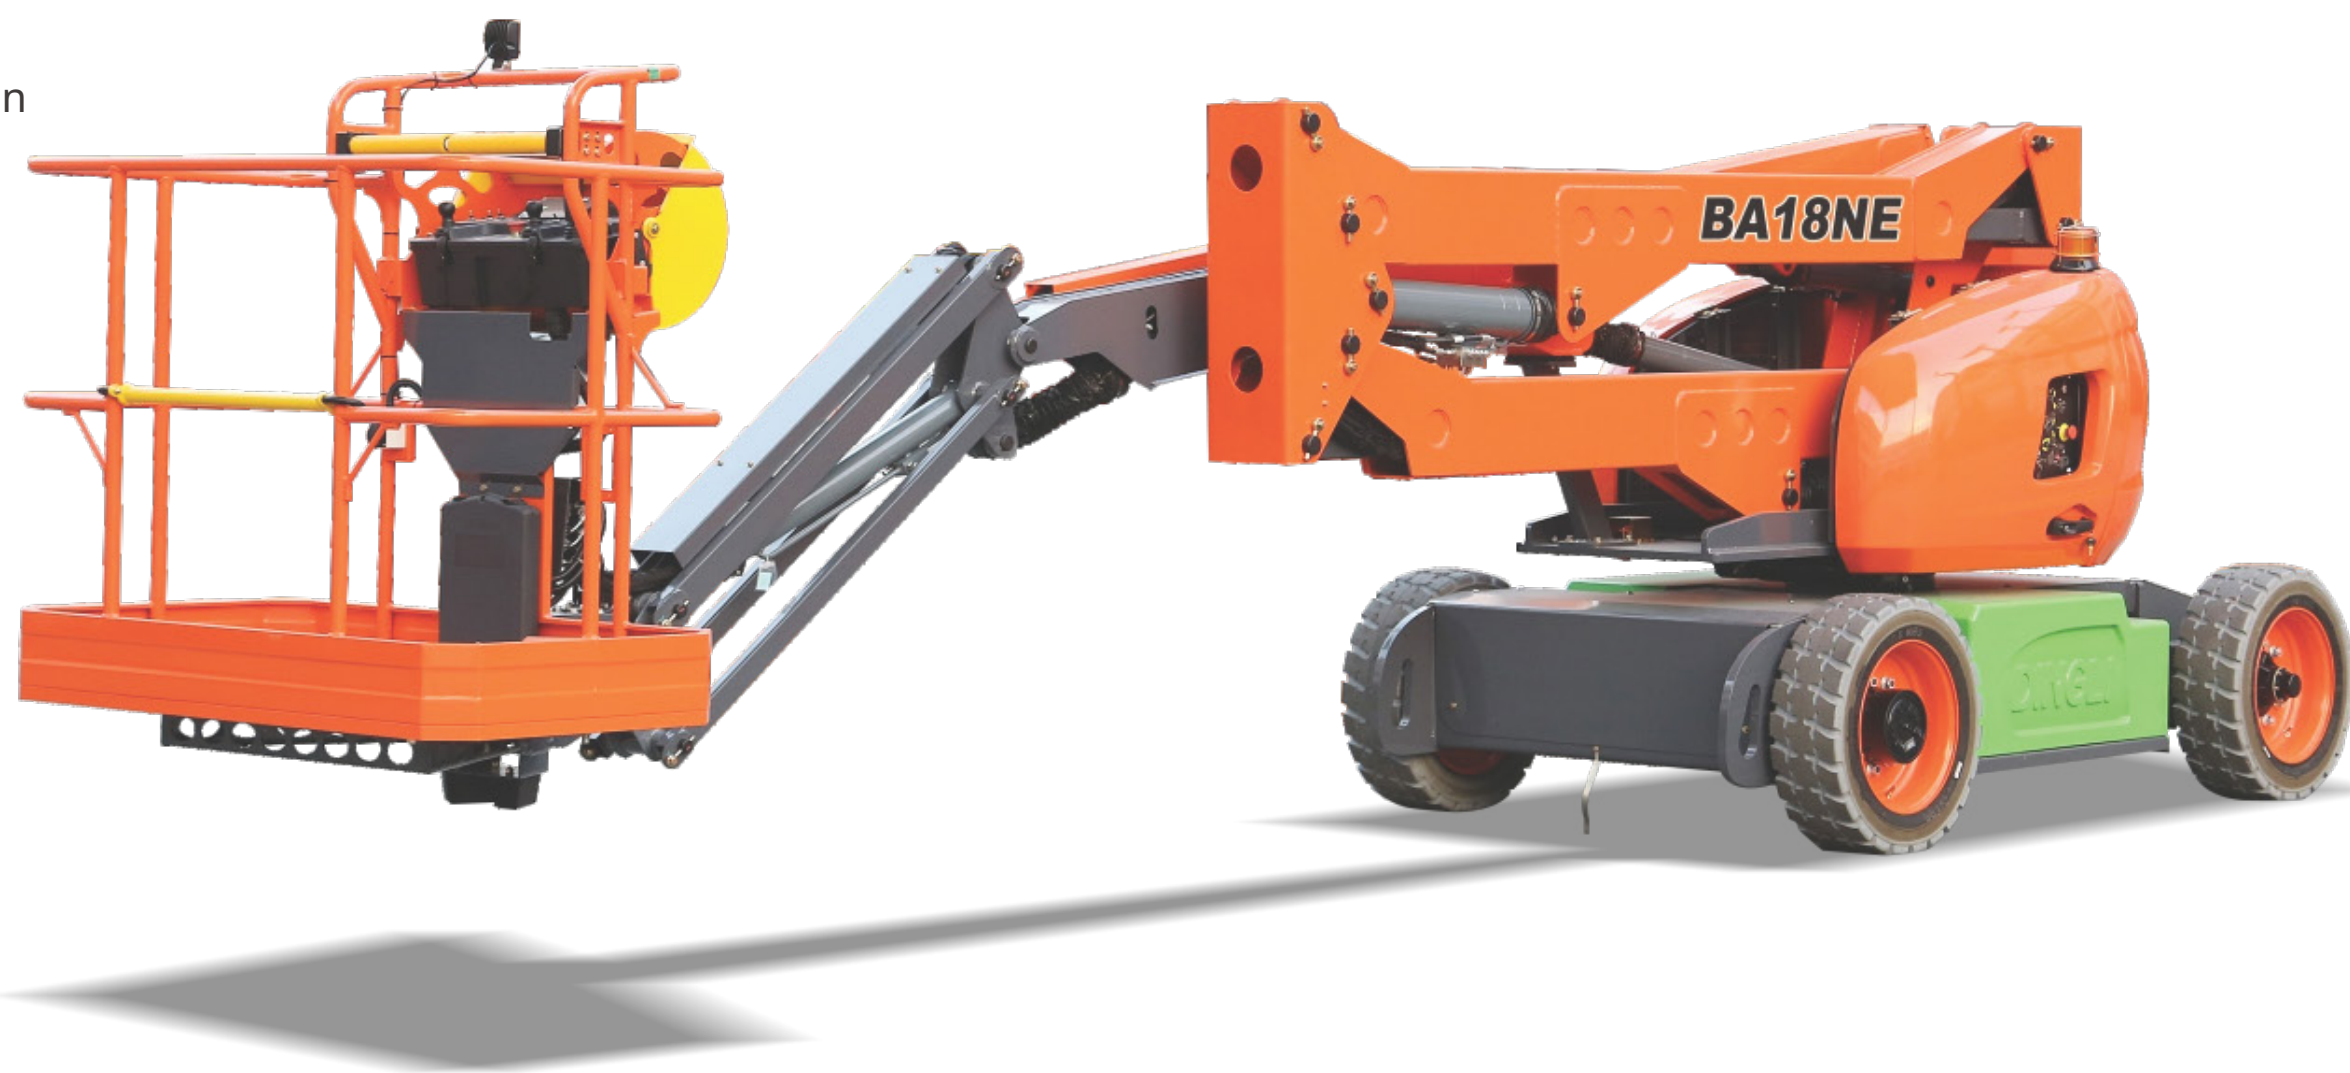

**ACCESS SPECIALTIES** LTD

104 Carbine road, Mount Wellington  
0800 DINGLI (346 454)

E. Brendan@accessspecs.co.nz

www.accessspecs.co.nz



Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall 2023-07 prevail. The copyright is owned by Zhejiang Dingli, any content may not be copied or copied for any purpose without written permission.

2023-07