






## **SPECIFICATIONS**

Dimension	Metric	British
Max. Working Height 🛕	8.00m	26ft 3in
Max. Platform Height 📵	6.00m	19ft 8in
Overall Length <b>©</b>	2.48m	8ft 2in
Overall Width <b>()</b>	0.83m	2ft 9in
Overall Height(Rails Up)	2.23m	7ft 4in
Overall Height(Rails Down)	1.77m	5ft 10in
Platform Size(Length ×Width)	2.27m×0.81m	7ft 5in×2ft 8in
Platform Extension Size <b>©</b>	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	4in/1in
Wheelbase <b>(†)</b>	1.87m	6ft 2in
Turning Radius(Inside/Outside)	0m/2.10m	0in/6ft 11in
Tyres	φ381×127mm	φ381×127mm

Performance		
S.W.L	408kg	900lb
S.W.L on Extension	113kg	249lb
Max. Occupants (Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	6.0km/h	3.73mph
Travel Speed(Raised)	0.8km/h	0.50mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	30/43sec	30/43sec

Weight			
Overall Weight	2160kg	4761lb	

20L	5.3gal
28.8V/150Ah	28.8V/150Ah
28V/30A	28V/30A
2×15VAC/0.87kW	2×15VAC/0.87kW
15VAC/3.42kW	15VAC/3.42kW
	28.8V/150Ah 28V/30A 2×15VAC/0.87kW

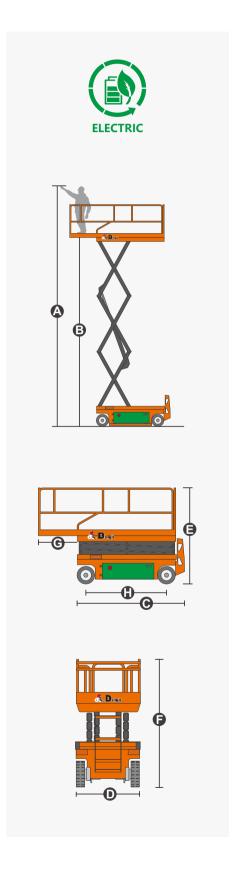






## **FEATURES**

## Standard Items

- Proportional Joystick Controls Tie-Down And Lifting Points
- Self-lock Gate On Platform
- Drivable At Full Height
- Non-Marking Tires
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Brake System
- Emergency Descent System
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Alarm
- All Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- One-Way Platform Extension Deck
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point



- Platform Load Sense System
- Emergency Stop Button
- Hydraulic oil receiver
- Pure electric steering system
- · Kinetic energy recovery system



## ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











