



## SPECIFICATIONS

| Size                                | Metric             | British                  |
|-------------------------------------|--------------------|--------------------------|
| Max. Working Height                 | 28.60m             | 93ft 10in                |
| Max. Platform Height                | 26.60m             | 87ft 3in                 |
| Max. Operating Range(+0.6m)         | 21.90m             | 71ft 10in                |
| Max. Platform Range                 | 21.30m             | 69ft 11in                |
| Flatbed Transport Dimensions(L×W×H) | 11.50m×2.50m×2.96m | 37ft 9in×8ft 2in×9ft 8in |
| Standard Container Transport        | All Applicable     | All Applicable           |
| Platform Size(Length×Width)         | 2.44m×0.91m        | 8ft×3ft                  |
| Turntable Tailswing                 | 1.61m              | 5ft 3in                  |
| Ground Clearance <b>A</b>           | 0.41m              | 1ft 4in                  |
| Wheelbase <b>B</b>                  | 2.80m              | 9ft 2in                  |
| Turning Radius(Inside/Outside)      | 1.87m/3.22m        | 6ft 2in/10ft 7in         |
| Tyres                               | 385/45-28          | 385/45-28                |



| Performance          |                |                |
|----------------------|----------------|----------------|
| S.W.L                | 454kg          | 1000lb         |
| Max. Occupants       | 3              | 3              |
| Gradeability         | 30%            | 30%            |
| Travel Speed(Stowed) | 6.0km/h        | 3.7mph         |
| Travel Speed(Raised) | 1.1km/h        | 0.7mph         |
| Max. Working Slope   | X-5°/Y-5°      | X-5°/Y-5°      |
| Turret Rotation      | 360°Continuous | 360°Continuous |
| Platform Rotation    | 180°           | 180°           |
| Jib Movement         | 135°           | 135°           |

| Weight         |         |         |
|----------------|---------|---------|
| Overall Weight | 18400kg | 40565lb |

| Power                  |            |            |
|------------------------|------------|------------|
| Lithium Battery        | 420Ah/80V  | 420Ah/80V  |
| Emergency Power System | 12V        | 12V        |
| Driving Motor          | 54VAC/18kW | 54VAC/18kW |
| Diesel Tank            | 110L       | 29gal      |
| Hydraulic Tank         | 165L       | 43gal      |

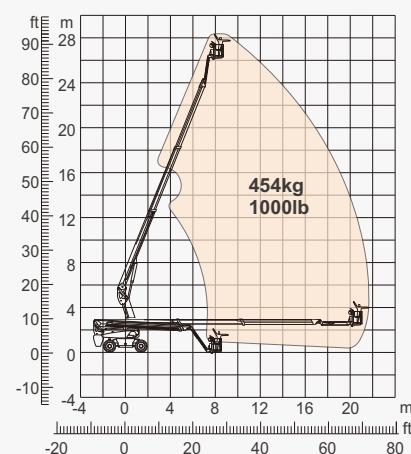

Range Of Motion

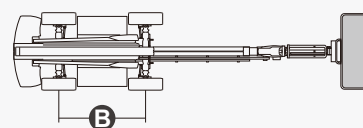

## FEATURES

### Standard Items

- 2.31m(7ft 7in) Jib
- Front Oscillating Axle
- Four-Wheel Steering
- Four-Wheel Drive
- Self-Leveling Platform
- 180° Left And Right Swing Platform
- Proportional Joystick Controls
- Thumb Rocker Steer
- Drive Enable
- Ac Power Cord To Platform
- Tilt Alarm
- Descent Alarm
- Flash
- Horn
- Hour Meter
- Integral Integrated Special Drive Axle  
For Construction Machinery
- 360° Continuous Turntable Rotation
- Positive Traction Four Wheel Drive
- Platform Load Sense System
- Fault Diagnosis System
- Operator Anti-crushing Protection System
- Harsh Environment Kits
- 12V DC Auxiliary Power
- Lithium Battery 420Ah/80V
- Driving Motor 18kW 3243rpm
- Lifting Motor 24kW 2150rpm



Telescopic  
Boom-BT



Working  
Height-28m




Jib



Hybrid-H




Rough  
Terrain-RT

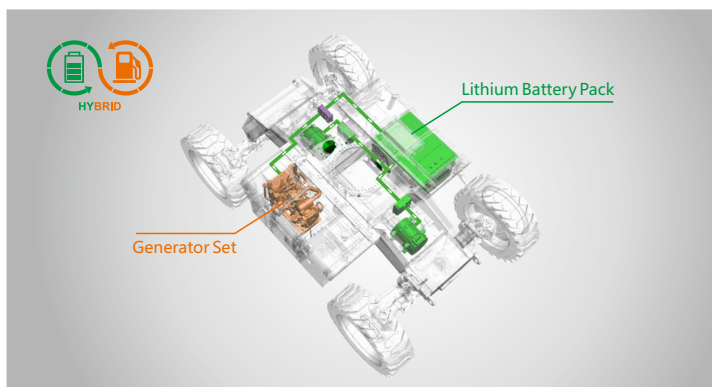

Hybrid-Super Long Endurance Of 30 Days



454kg-Heavy Load



Multiple Steering Modes



Anti Extrusion Device

ACCESS SPECIALTIES

104 Carbine road, Mount Wellington  
0800 DINGLI (346 454)  
E. Brendan@accessspecs.co.nz  
www.accessspecs.co.nz



Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall 2024-02prevail. The copyright is owned by Zhejiang Dingli, any content may not be copied or copied for any purpose without written permission.