




SPECIFICATIONS

| Dimension | Metric | British |
|--------------------------------------|-------------|-------------|
| Max. Working Height A | 18.00m | 59' 1" |
| Max. Platform Height B | 16.00m | 52' 6" |
| Max. Drive Height | 16.00m | 52' 6" |
| Overall Length C | 4.88m | 16' |
| Overall Width D | 2.33m | 7' 8" |
| Overall Height(Rails Up) E | 3.23m | 10' 7" |
| Overall Height(Rails Down) F | 2.47m | 8' 1" |
| Platform Size(Length ×Width) | 4.88m×1.83m | 16'×6' |
| Platform Extension Size G / H | 1.43m/1.13m | 4' 8"/3' 8" |
| Ground Clearance(Stowed/Raised) | 0.30m | 1' |
| Wheelbase I | 2.86m | 9' 5" |
| Turning Radius(Inside/Outside) | 2.70m/5.50m | 8' 10"/18' |
| Tyres | 315/55/D20 | 315/55/D20 |

| Performance | | |
|---------------------------------|-------------------|-------------------|
| S.W.L | 680kg | 1499lb |
| S.W.L on Extension | 227kg | 500lb |
| Max. Occupants(Indoor/Outdoor) | 4/4 | 4/4 |
| Gradeability | 40% | 40% |
| Travel Speed(Stowed) | ≥6.0km/h | ≥3.73mph |
| Travel Speed(Raised)(<11m/≥11m) | ≥1.0km/h ≥0.6km/h | ≥0.62mph ≥0.37mph |
| Max. Working Slope(<11m/≥11m) | 2°/3° 1.5°/3° | 2°/3° 1.5°/3° |
| Up/Down Speed | 78/74sec | 78/74sec |

| Weight | | |
|----------------|--------|---------|
| Overall Weight | 8840kg | 19489lb |


| Power | | |
|-----------------|---------------------|---------------------|
| Diesel Engine | Kubota D1105/18.2kW | Kubota D1105/18.2kW |
| Diesel Tank | 80L | 21gal |
| Hydraulic Tank | 120L | 31gal |
| Lithium battery | 80VDC/67.5Ah | 80VDC/67.5Ah |
| Motor | 80VDC/10kW | 80VDC/10kW |

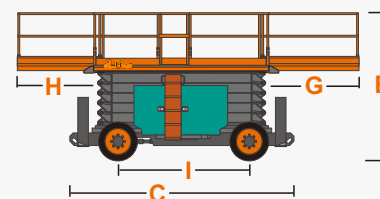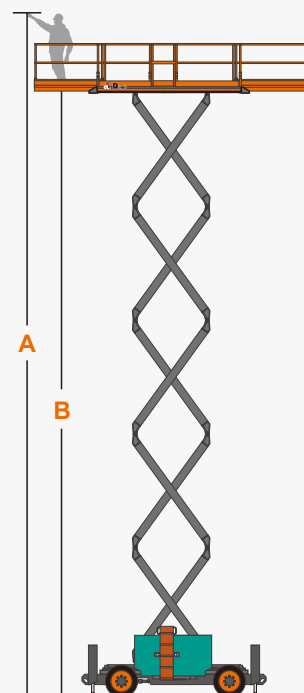

FEATURES

Standard Items

- Drivable At Full Height
- Proportional Joystick Controls
- Self-lock Gate On Platform
- Dual Slide-Out Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Drive axle
- Automatic Brake System
- Self-Weight Lowering System
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Alarm
- All Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Oscillating Axle Chassis

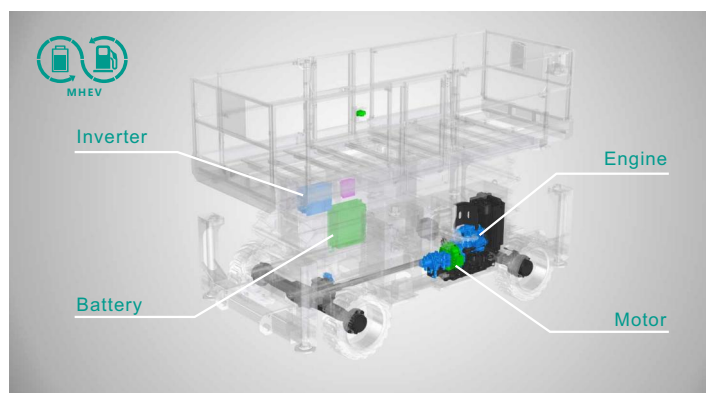

Mild Hybrid

ACCESS SPECIALTIES LTD

104 Carbine road, Mount Wellington
0800 DINGLI (346 454)

E. Brendan@accessspecs.co.nz

www.accessspecs.co.nz

