

SPECIFICATIONS


Size	Metric	British
Max. Working Height 🛕	7.6m	24ft 11in
Max. Platform Height 📵	5.6m	18ft 5in
Overall Length 😉	1.52m	5ft
Overall Width ①	0.81m	2ft 8in
Overall Height(Rails Up) 📵	2.01m	6ft 6in
Overall Height(Rails Down) 🕞	1.65m	5ft 5in
Platform Size(Length×Width)	1.37m×0.70m	4ft 6in×2ft 4in
Platform Extension Size ©	0.60m	2ft
Ground Clearance(Stowed/Raised)	0.06m/0.015m	2in/1in
Wheelbase ()	1.13m	3ft 9in
Turning Radius(Inside/Outside)	0.45m/1.60m	1ft 5.7in/5ft 3in
Tyres	φ230×100mm	φ230×100mm

Performance		
S.W.L	230kg	507lb
S.W.L On Extension	1 13kg	249lb
Max. Occupants	2	2
Gra deability	25%	25%
Travel Speed(Stowed)	4.0km/h	4.0km/h
Travel Speed(Raised)	0.6km/h	0.6km/h
Max. Working Slope	1.5°/3°	1.5°/3°
Up/Down Speed	30/23sec	30/23sec

Weight			
Overall Weight	1300kg	2866lb	

Power			
Hydraulic Tank	4L	4L	
Battery	2×12V/115Ah	2×12V/115Ah	
Charger	24V/15A	24V/15A	
Driving Motor	2×24VDC/0.5kW	2×24VDC/0.5kW	
Lifting Motor	24VDC/2.2kW	24VDC/2.2kW	

^{*} The platform height plus 2m (7ft in British standard) is the working height. Standards Compliance

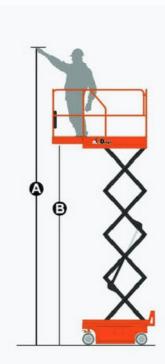







Solf-propelled Scissor Lifts

FEATURES

Standard Items

- · Proportional Joystick Controls
- Self-Locking Gates
- · One-Way Platform Extension Deck
- · Drivable At Full Height
- Non-Marking Tires
- 4×2 Drive
- Platform Load Sense System
- · Emergency Descent System
- · Tubing Explosion-Proof System
- · Onboard Fault Diagnostic System
- · Tilt Alarm
- · Motion Alarm
- · Horn
- Hour Meter
- · Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- · Charging Protection System
- · Flashing LED Beacon
- · Foldable Guard Rails
- · Automatic Pothole Protection
- · Drive Enable
- · One-Way Platform Extension Deck
- · Manual Brake Release
- · Lanyard Attachment Point
- · Tie-Down And Lifting Points

Optional Items

Factory Hydraulic Oil

• No. 46 Hydraulic Oil (Mineral Oil)**

Additional Items

- · GPS Unit
- · Biodegradable Hydraulic Oil
- · AC Power Cord to Platform
- · Air Line to Platform
- · Work Light Package
- · Footpedal Switch
- · Anti-Collision Bar on Platform



** Factory default, if you have other needs, please contact EPS.

ACCESSSPECIALTIES

104 Carbine road, Mount Wellington 0800 DINGLI (346 454) E. Brendan@accessspecs.co.nz www.accessspecs.co.nz





Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall 2022-01 prevail. The copyright is owned by Zhejiang Dingli, any content may not be copied or copied for any purpose without written permission.